


STAINLESS STEEL "S" BEAM LOAD CELLS

HIGH ACCURACY, ECONOMICAL PRICE

Tension/Compression
LCM101 (Cable Style)
LCM111 (Connector Style)
10 kgf to 10,000 kgf

**LCM101/
LCM111 Series**

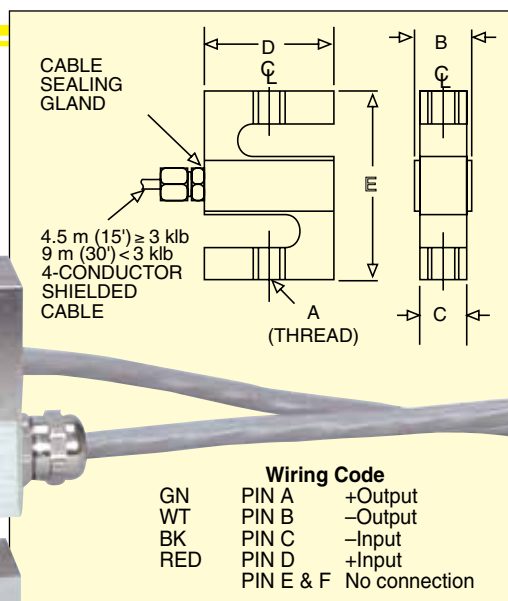

LCM101-100, cable style,
shown smaller than actual size.

- ✓ All Stainless Steel for Harsh Industrial Applications
- ✓ 0.25% Interchangeability for Multiple Load Cell Applications
- ✓ Calibrated in Tension
- ✓ 5-Point Calibration

Dimensions: mm (inch)

CAPACITY (kgf)	A	B	C	D	E	WEIGHT kg (lb)
10 to 100	M6 x 1.00	19 (0.75)	13 (0.50)	38 (1.5)	64 (2.5)	0.45 (1.0)
250 to 1000	M12 x 1.75	30 (1.17)	25 (1.0)	51 (2.0)	76 (3.0)	1.1 (2.5)
1500 to 2000	M16 x 2.0	32 (1.25)	25 (1.0)	51 (2.5)	89 (3.5)	1.6 (3.5)
5 K to 10 K	M24 x 2.00	44 (1.75)	38 (1.5)	76 (3.0)	108 (4.3)	2.0 (4.5)

Electrical (LCM101):
 <100 kg: 9 m (30') 24 AWG
 ≥250 kg: 4.6 m (15') 20 AWG
 ≥1500 kg: 4.6 m (15') 20 AWG
 (4-conductor shielded cable)

Mating Connector (LCM111):
 ≤100 kgf: PT06F8-4S (sold separately)
 ≥250 kgf: PT06F10-6S (sold separately)

SPECIFICATIONS

Excitation: 10 Vdc, 15 Vdc maximum
Output: 3 mV/V ±0.0075 mV/V
Linearity: ±0.03% FSO
Hysteresis: ±0.05% FSO
Repeatability: ±0.01% FSO
Zero Balance: ±1% FSO
Operating Temp Range:
 -40 to 93°C (-40 to 200°F)
Compensated Temp Range:
 17 to 71°C (60 to 160°F)
Thermal Effects:
 Zero: 0.0018% FSO/°C
 Span: 0.0018% FSO/°C
Safe Overload: 150% of capacity
Ultimate Overload:
 300% of capacity
Input Resistance: 350 ±10 Ω
Output Resistance: 350 ±10 Ω
Full Scale Deflection:
 0.25 to 0.50 mm
Construction: 17-4 PH stainless steel

To Order

CAPACITY		MODEL		COMPATIBLE* METERS	LOAD BUTTON	ROD END
kgf	lbf	CABLE	CONNECTOR		MODEL NO.	MODEL NO.
10	22	LCM101-10	LCM111-10	iSeries, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
25	55	LCM101-25	LCM111-25	iSeries, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
50	110	LCM101-50	LCM111-50	iSeries, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
100	220	LCM101-100	LCM111-100	iSeries, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
250	551	LCM101-250	LCM111-250	iSeries, DP41-S, DP25B-S	MLBC-M12	MREC-M12M
500	1102	LCM101-500	LCM111-500	iSeries, DP41-S, DP25B-S	MLBC-M12	MREC-M12M
1000	2205	LCM101-1K	LCM111-1K	iSeries, DP41-S, DP25B-S	MLBC-M12	MREC-M12M
1500	3307	LCM101-1.5K	LCM111-1.5K	iSeries, DP41-S, DP25B-S	MLBC-M16	MREC-M16M
2000	4409	LCM101-2K	LCM111-2K	iSeries, DP41-S, DP25B-S	MLBC-M16	MREC-M16M
5000	11,023	LCM101-5K	LCM111-5K	iSeries, DP41-S, DP25B-S	MLBC-M24	MREC-M24M
10,000	22,046	LCM101-10K	LCM111-10K	iSeries, DP41-S, DP25B-S	MLBC-M24	MREC-M24M

Comes complete with 5-point NIST-traceable calibration.

* Visit us online for compatible meters.

Ordering Examples: LCM111-100, 100 kgf capacity connector-style load cell.
 PT06F8-4S, mating connector (not included). MREC-M6M, matching rod end.
 MLBC-M6, matching load button. LCM101-2K, 2000 kgf capacity cable-style load cell
 MREC-M16M, matching rod end.