

Quick Disconnect Probes

Plug into HDX-OTP Handles



PR-13 probe shown mounted in the HDX-OTP handle. Contact Sales for details.

**HDX-OTP-U-OTP-M
Probe Handle**
RTD Probe sold separately

For additional handle and thermocouple probe styles, visit us online.

For RTD Probes

Make Fast, Sure Connections

OMEGA® quick disconnect custom RTD probes plug directly into the rugged HDX-OTP handle for many applications. All OMEGA® RTD probes have DIN tolerance platinum RTD elements to assure complete interchangeability; one handle can be used with any quick disconnect RTD sensor.

The rugged aluminum die-cast handle is designed to accept any quick disconnect RTD probe, giving fast, sure connections. The standard retractable cable [300 mm (1') stretches to 1.5 m (5')] is provided with stripped leads, OTP quick disconnect connector, phone plug or series T mini-connector available.

Type PR-13, 6 mm (1/4") Diameter General Purpose Probe

A general purpose, quick disconnect probe, available with 6 mm (1/4") OD, in standard lengths from 150 to 600 mm (6 to 24"). For full ordering information, see PR-13 series at omega.com/pr-13.

Type PR-13, 3 mm (1/8") Diameter Fast Response Probe


A general purpose, quick disconnect probe, available with either 3 mm (1/8") or 1.5 mm (1/16") OD. For full ordering information, see PR-13 series at omega.com/pr-13.

PRX-NP-100-E-12 Penetration Probe

300 mm (12") long probe with 4.5 mm (3/16") OD, fitted with a conical tip for easy insertion into soft and semi-frozen material. Made from rugged 304SS, with a quick disconnect OTP connector. Tip rated to 600°C (1110°F).

PRX-AP-100-E-12 Air Probe

300 mm (12") long probe, 4.5 mm (3/16") OD, using a miniature RTD element shielded by a 304SS sheath. The drilled end exposes the element to airflow for fast measurement. Measurement tip rated to 260°C (500°F).

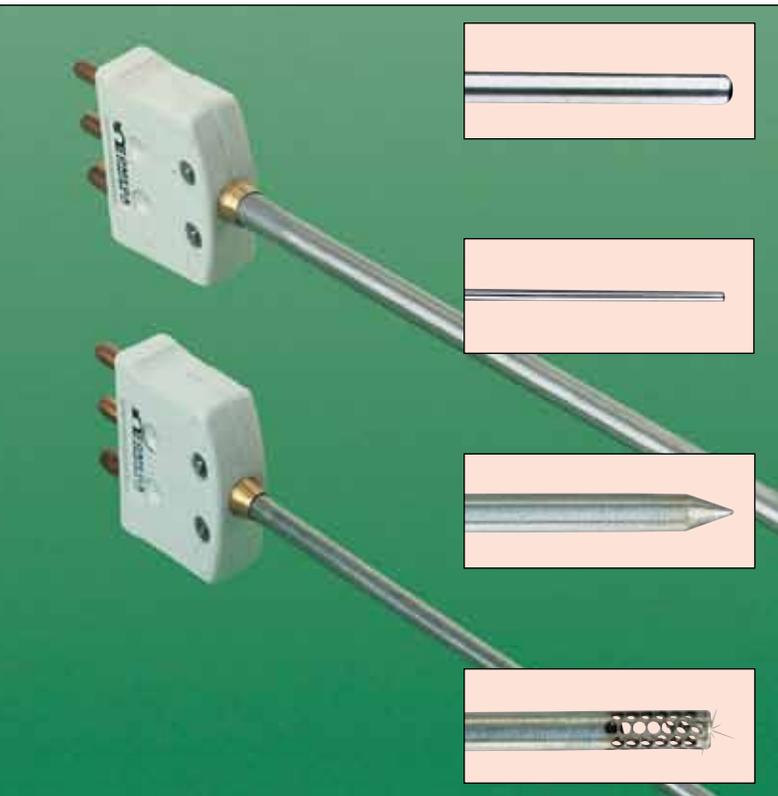

Options



OM-SQ2010 data logger, visit us online.



CN8552-RTD process controller, visit us online.



DP25B-RTD process meter/controller, visit us online.



OM-DAQPRO-5300, handheld data logger, visit us online.



HH804U meter, visit us online.