




Model
CM-3

Digital Clamp Meter with True RMS, Peak Hold and Min/Max

Measures DC/AC Voltage, DC/AC Current, Energy, Resistance

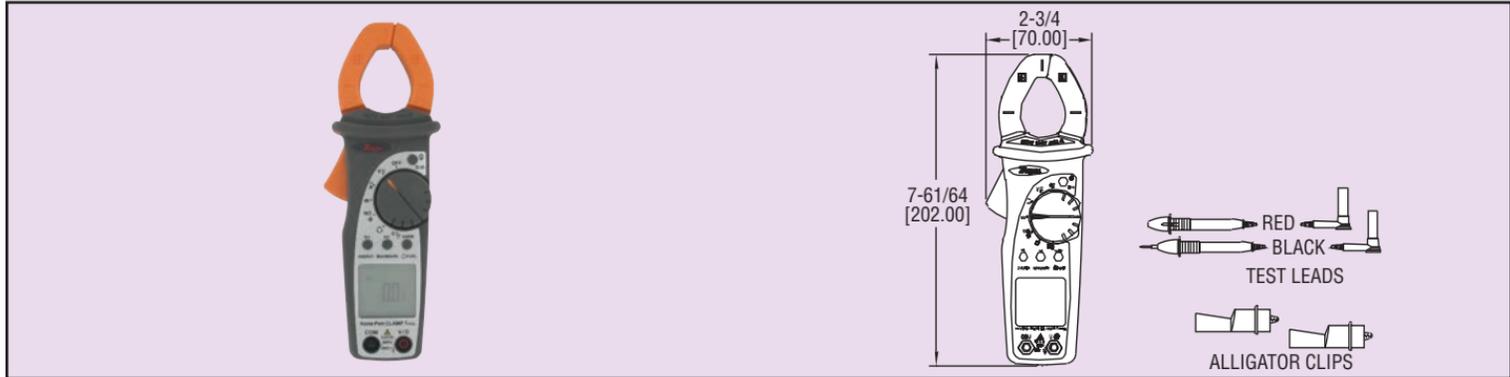

Our compact, low cost **Model CM-3 Digital Clamp Meter** is ideal for general electrical testing and troubleshooting. A few applications include HVAC, automotive, electrical/power, and environmental monitoring uses. The CM-3 measures DC and AC voltage to 600 V, AC current to 400 A, and resistance to 2000 Ω . The digital clamp meter features data/range hold and auto range buttons to prevent the screen from updating when gathering values, as well as a zero function. Additional features include single and three phase energy measurement, MIN/MAX and average. The 3-3/4 digit backlit LCD features automatic polarity, overload, low battery indication and a bar graph. The Model CM-3 is furnished with red and black test leads, batteries and a carrying case with belt loop.

Model CM-3, Digital Clamp Meter with True RMS, Peak Hold and Min/Max

SPECIFICATIONS

Over Voltage Category: CAT III 600 V.

AC Voltage: 0.1 V to 600 V \pm (1.0% + 3 digit).

DC Voltage: 0.1 V to 600 V \pm (1.0% + 3 digit).

AC Current: 0.1 A to 400 A \pm (1.0% + 3 digit).

Resistance: 0.1 to 2000 Ω \pm (1.0% + 5 digit).

Continuity Test: Audible buzzer.

Max Conductor Size: 1.18" diameter (30 mm).

Frequency: 40 Hz to 400 Hz \pm (0.5% + 1).

Active Power Range: 0 to 1000 kW \pm (3.5% + 3).

Display: Backlit with bar graph. 10,000 counts plus decimal point.

Power Requirements: (2) AAA alkaline batteries, included, user replaceable.

Weight: 9.88 oz (280 g).