

## SPECIAL APPLICATION THERMOCOUPLES AND RTD'S












Flexible FEP Covered Bead Junction

Ring Type Surface Thermocouples and RTD's

Web Type Surface Thermocouples

to watch product video

## **SERIES P PENETRATION PROBE STYLES**







## 1. Transition Fitting



Scan here to watch product video



2. Straight Handle

4. Flanged Handle



3. Saber Handle

6&7. Euro Style Handle (FEP or SS)

SERIES 9 & P Special Application Thermocouples and RTD's cover a wide variety of types and configurations. This section covers FEP covered thermocouples and RTD's, ring type thermocouples and RTD's for surface measurement, web type thermocouples for surface measurement of moving objects such as rollers, and penetration thermocouples and RTD's with sharp tips for measurement of viscous liquids and semisolids such as plastic compounds, rubber and slightly frozen food products.

## **MODEL CODING**

T - T/C

6 - RTD DIN

4 - RTD NIST

2 - Straight Handle, SS

4 - Flanged Handle, SS

3 - Saber Handle, SS


7 - Euro Style, SS

Z - RTD DIN 1K 6 - Euro Style, FEP

6 - FEP Over SS

Flex Hose

Fill in the appropriate numbers or letters to specify the probe of your choice. Fill in all boxes. If an item or dimension does not apply, fill those boxes with zeros '0'.

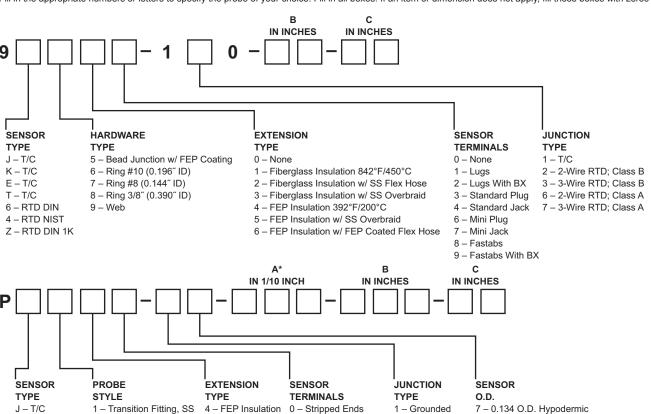

1 - Lugs

2 - Lugs With BX

3 - Standard Plug

4 - Standard Jack

6 - Mini Plug 7 - Mini Jack 2 – Ungrounded

8 - 0.180 O.D. Hypodermic

\*"A" Dimension maximum length is 12" (30 cm)