

## Technical Specifications


Model	GFK 165aH	GFK 165a	GFK 330aH	GFK 330a	GFK 660a	GFK 1320a
Maximum capacity	165lb/75kg	165lb/75kg	330lb/150kg	330lb/150kg	660lb/300kg	1320lb/600kg
Readability	0.002lb/1g	0.01lb/5g	0.005lb/2g	0.02lb/10g	0.05lb/20g	0.1lb/50g
Pan size	15.7 x 19.7" / 400 x 500mm					23.6 x 31.5" / 600 x 800mm

## General Specifications

Typical stabilisation time	2-3 Sec
Power supply	Internal rechargeable battery internal 230VAC or 120VAC 50/60Hz Transformer
Display	Backlit green display with 20mm digits and capacity tracker
Housing	ABS Plastic Indicator and Stainless Steel Pan
Overall dimensions (wxdxh)	15.7 x 24.4 x 33.9" / 400 x 620 x 860mm

## Key Accessories

- In-use Cover
- RS-232 to PC Cable
- AdamDU - Data Collection Program
- RS-232 to USB Interface Cable (must be ordered in conjunction with
- ATP Thermal Printer
- Thermal Paper For Adam ATP (10 pack)

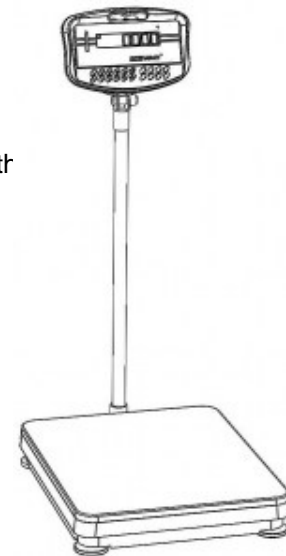

cable)



Adam Equipment - offices worldwide

[www.adamequipment.com](http://www.adamequipment.com)